




# PowerFlex

## Steel Corded PU Timing Belt

PowerFlex metric timing belts are manufactured from high quality polyurethane material, reinforced with helically wound zinc coated steel cords, allowing a high breaking load and extremely low elongation.

### Benefits

- > Zinc coated steel cords
- > Excellent dimensional stability, extremely low elongation
- > Conditionally resistant to chemicals and oil
- > Low pre-tension requirement
- > High breaking load
- > -25°C to +80°C temperature range
- > Available in open lengths

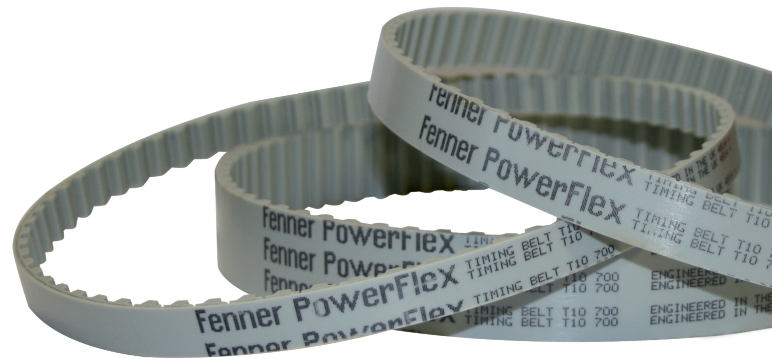

### Size Reference

T2.5, T5, T10, T20, AT5, AT10, AT20

# Fenner®

Reliable | Trusted | Connected