




# Rigid Coupling

## Rigid Coupling

Taper Lock® rigid couplings provide a convenient method of rigidly connecting the ends of shafts. Taper Lock® bushes permit easier and quicker fixing to the shafts with the firmness of a shrunk-on-fit.

### Benefits

- > Taper Lock® fixing as standard
- > Peripheral speeds of up to 33m/s available
- > Vertical assemblies possible in FF design

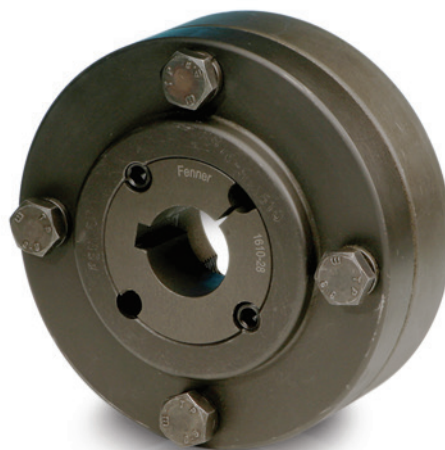

### Size Reference

Size reference	Maximum bore size in mm	
	Taper lock bush	
RM12	32	
RM16	42	
RM25	60	
RM30	75	
RM35	100	
RM40	110	
RM45	125	
RM50	125	

### Construction

Peripheral speeds of up to 33m/s available

Taper Lock® fixing as standard



Vertical assemblies possible in FF design

# Fenner®

Reliable | Trusted | Connected